



TWOTHOUSAND MACHINERY CO., LTD

No.18-105 Huagang Garden, Zhongshan Avenue, Guangzhou, China

Tel: 0086-20-38768241 | Fax: 0086-20-38769376

Email: exp@twothousand.com | Website: www.twothousand.com



2019

BAKING & FOOD SERVICE EQUIPMENT



FOOD SERVICE LEADER

INTRODUCTION

TWOTHOUSAND® in existence since 2000 year has become synonyms with complete kitchen equipment supply for restaurants.

TWOTHOUSAND® a brand registered in Europe from OHIM offers complete kitchen solution and we even offer 1 year warranty with our products.

TWOTHOUSAND® state-of-art factory spanning over 5000 m² is in close proximity to Baiyun International Airport.

Restaurants and commercial establishments of varying size from America, Asia, Africa, Europe and Oceania have placed their esteemed trust on us for over 10 years.

TWOTHOUSAND®

KITCHEN DESIGN

SERVICE



TWOTHOUSAND®

KITCHEN DESIGN

SERVICE



CUSTOMERS



CONTENT


P07 Pizza Oven	P23 Trolley	P39 Dish Washer
P11 Deck Oven	P25 Dinning Cart	P41 Glass Washer
P15 Proofer	P27 Working Table	P42 Water Boiler
P17 Tunnel Oven	P29 Sink Table	P43 Film Sealer
P19 Rotary Rack Oven	P31 Rack	P44 Cup Sealer
P20 Tandoor Oven	P32 Cabinet	P45 Vacuum Packer
P21 Convection Oven	P34 Gastronom	P47 Carton Sealer
P22 Salamander	P36 Chafing Dish	

PIZZA OVEN

BEST SELLING PIZZA OVEN

- Heating elements from Europe
- High precision digital control system
- Steaming function is optional

1 DECK

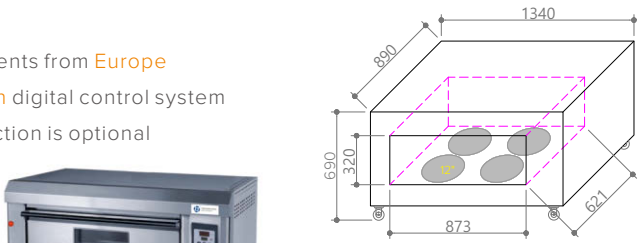

TEMPERATURE
MAX. 400 °C

CHAMBER SIZE
873×621×320 MM



MODEL	TT-O38BP	TT-O39BP
MATERIAL	All S/S	All S/S
ENERGY	2800 Pa / LPG	380 V
Power	0.35 KG / H	6 Kw
WEIGHT	150 KG	90 KG
SIZE	1340X960X740 MM	1340X890X690 MM

2 DECKS



TEMPERATURE
MAX. 400 °C

CHAMBER SIZE
873×621×320 MM ×2

MODEL	TT-O38DP	TT-O39DP
MATERIAL	All S/S	All S/S
ENERGY	2800 Pa / LPG	380 V
Power	0.7 kg / H	12 Kw
WEIGHT	320 KG	175 KG
SIZE	1340X960X1440 MM	1340X890X1390 MM

3 DECKS



TEMPERATURE
MAX. 400 °C

CHAMBER SIZE
873×621×320 MM ×3

MODEL	TT-O38FP	TT-O39FP
MATERIAL	All S/S	All S/S
ENERGY	2800 Pa / LPG	380 V
Power	1.05 kg / h	21 Kw
WEIGHT	470 KG	218 KG
SIZE	1340X925X1720 MM	1340X860X1690 MM

ELECTRIC EUROPEAN PIZZA OVEN




- High temperature resistance
- Automatic thermostat
- Over-temperature protection
- Microcomputer control
- Great output to bake delicious pizza

voltage
380 V 50 HZ

TEMPERATURE
MAX. 400 °C




TT-O124




TT-O124A

Model	TT-O124	TT-O124A
TYPE	1 DECK	1 DECK WITH SHELF
POWER	8 Kw	8 Kw
chamber SIZE	900×750×260 MM	900×750×260 MM
MACHINE SIZE	1330×955×450 MM	1330×955×450 MM
SHELF SIZE	/	1330×1205×890 MM
MATERIAL	All S/S	All S/S

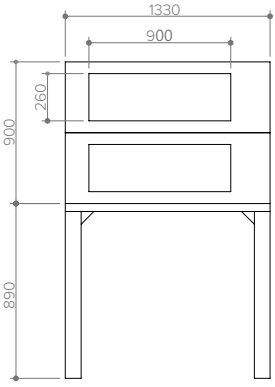

TT-O124B

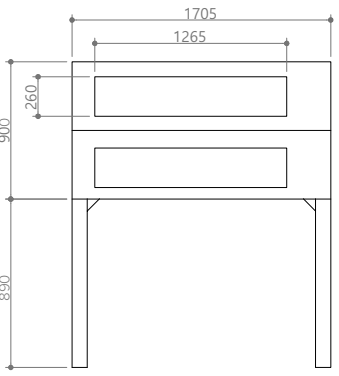

TT-O124C

Model	TT-O124B	TT-O124C
DECK	2 DECKS with shelf	2 DECKS WITH SHELF
POWER	8 Kw + 8 Kw	10 Kw + 10 Kw
chamber SIZE	900×750×260 MM ×2	1265×825×260 MM ×2
machine SIZE	1330×955×900 MM	1705×1070×900 MM
SHELF SIZE	1330×1205×890 MM	1750×1265×890 MM
MATERIAL	All S/S	All S/S

PIZZA OVEN

ECONOMICAL OVEN FOR PIZZA AND BREAD

DOOR OPEN direction

DOOR OPEN direction

DOOR OPEN direction



BIG CHAMBER

PIZZA STONE INCLUDED

OVEN MODEL FOR BREAD

TT-O301
3 DECK 6 TRAYS

TT-O302
3 DECKS 9 TRAYS

MATERIAL

FRONT S/S 201


temperature

MAX. 400°C

MODEL	TT-O301P	TT-O302P
CAPACITY	3 DECKS	3 DECKS
TRAY SIZE	400X600 MM	400X600 MM
SIZE	1350X1200X1770 MM	1350X1800X1770 MM
voltage	380 V	380 V
power	21 KW	30 KW
weight	650 KG	750 KG

ECONOMICAL PIZZA OVEN

chamber layout

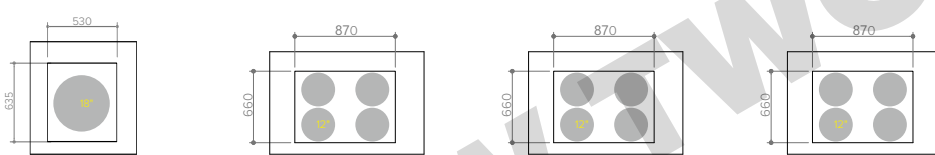

MATERIAL

FRONT S/S



Competitive price

Classic design

Model	TT-O160	TT-O157	TT-O158	TT-O159
DECKS	1 DECK	1 DECK	2 DECKS	3 DECKS
voltage	220v	380v	380v	380v
INNER SIZE	635×530×180 MM	870×660×215 MM	870×660×215 MM×2	870×660×215 MM×3
SIZE	1060×580×650 MM	1230×870×690 MM	1230×870×1250 MM	1230×870×1560 MM
POWER	5.0 Kw	8.4 Kw	16.8 Kw	25.2 Kw
weight	90 kg	140 kg	280 kg	350 kg

ELECTRICAL CONVEYOR
DIGITAL PIZZA OVEN

Transmission direction can be controlled freely

Top and bottom heating with individual controller



Easy handling for choosing front or rear discharge

MAX. TEMPERATURE

400 °C

BAKING TIME

4 - 5 minutes

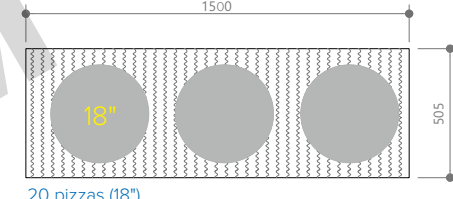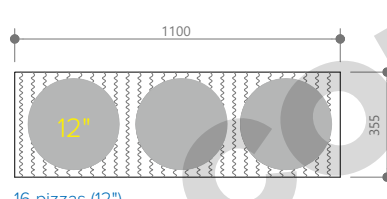

Model	TT-D5A	TT-D5B
pizza output	16 pizzas (12") / hour	20 pizzas (18") / hour with shelf
BELT SIZE	1100×355 MM	1500×505 MM
work AREA	560×385 MM	800×540 MM
heating elements	18 pcs	24 pcs
SIZE	1125/1460×580×435 MM	1565/2140×750×1100 MM
voltage	220V / 50 Hz	380V / 50 Hz
POWER	6.7 Kw	10.3 Kw
Weight	49 kg	89 kg

ELECTRICAL CONVEYOR
MANUAL PIZZA OVEN

Transmission speed of the chain is adjustable



Temperature of the upper and lower heating element is adjustable

MAX. TEMPERATURE

400 °C

BAKING TIME

4 - 5 minutes

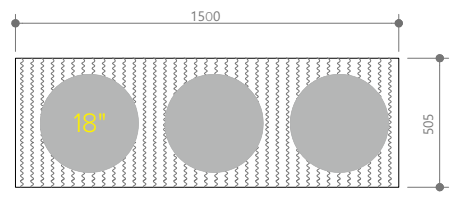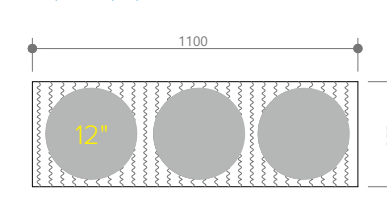


MODEL	TT-D5AM	TT-D5BM
work area	560×385 MM	800×540 MM WITH SHELF
SIZE	1125/1460×580×435 MM	1565/2140×750×1110 MM
voltage	220 V / 50 HZ	380 V / 50HZ
power	6.7 KW	10.3 KW
weight	46 KG	86 KG

DECK OVEN

BEST SELLING DECK OVEN

- Heating elements from Europe
- High precision of the digital control system
- Steaming function is optional

1 DECK 2 TRAYS



TEMPERATURE	CHAMBER SIZE
MAX. 350 °C	873x621x320 MM
tray size	MACHINE SIZE
400x600 MM	1340x960x740 MM (GAS)
	1340x890x690 MM (ELEC.)

MODEL	TT-O38B	TT-O39B
MATERIAL	All S/S	All S/S
ENERGY	2800 Pa / LPG	380 V
Power	0.35 KG / H	6 Kw
WEIGHT	150 KG	90 KG

2 DECKS 4 TRAYS



MACHINE SIZE
1340x960x1140 MM (GAS)
1340x890x1390 MM (ELEC.)

MODEL	TT-O38D	TT-O39D
MATERIAL	All S/S	All S/S
ENERGY	2800 Pa / LPG	380 V
Power	0.70 KG / H	12 Kw
WEIGHT	320 KG	175 KG


3 DECKS 6 TRAYS



MACHINE SIZE
1340x925x1720 MM (GAS)
1340x860x1690 MM (ELEC.)

MODEL	TT-O38F	TT-O39F
MATERIAL	All S/S	All S/S
ENERGY	2800 Pa / LPG	380 V
Power	1.05 KG / H	21 Kw
WEIGHT	470 KG	218 KG


BEST SELLING DECK OVEN

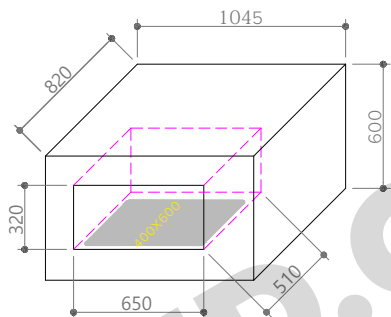

1 DECK 1 TRAY



MODEL	TT-O38BO
MATERIAL	All S/S
GAS consumption	0.28 KG / H
Power	75 W / 220 V
WEIGHT	100 KG
enERGY	2800 Pa
SIZE	1045x850x600 MM

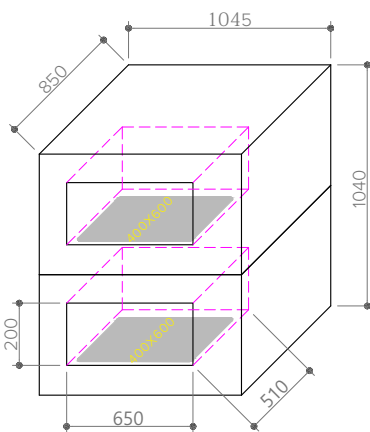

2 DECKS 2 TRAYS



MODEL	TT-O38DO
MATERIAL	All S/S
GAS consumption	0.56 KG / H
Power	150 W / 220 V
WEIGHT	210 KG
enERGY	2800 Pa
SIZE	1045x850x1040 MM

DECK OVEN

ECONOMICAL DECK OVEN




1 DECK 1 TRAY

CHAMBER SIZE
630×528×160 MM

MATERIAL
FRONT S/S

tray size
400×600 MM

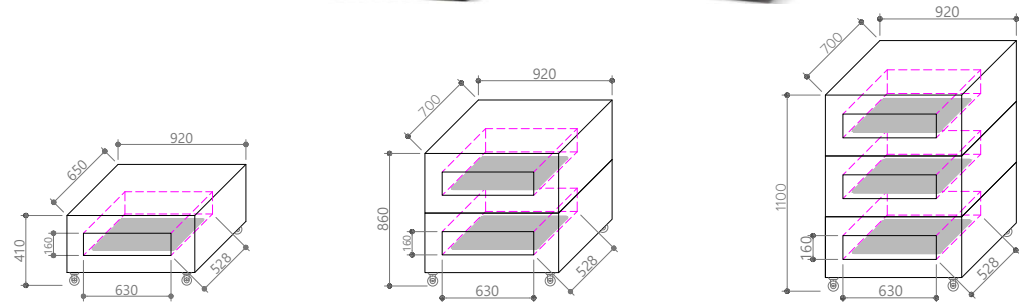

Model	TT-O119A	TT-O155	TT-O156
DECK	1 DECK	2 DECKS	3 DECKS
TRAY	1 TRAY	2 TRAYS	3 TRAYS
SIZE	920×650×410 MM	920×700×860 MM	920×700×1100 MM
Voltage	220 V	220 V	380 V
POWER	4.4 Kw	8.8 Kw	13.2 Kw
WEIGHT	42 Kg	78 Kg	110 Kg


1 DECK 2 TRAYS



CHAMBER SIZE
870×660×213 MM

MATERIAL
FRONT S/S

tray size
400×600 MM

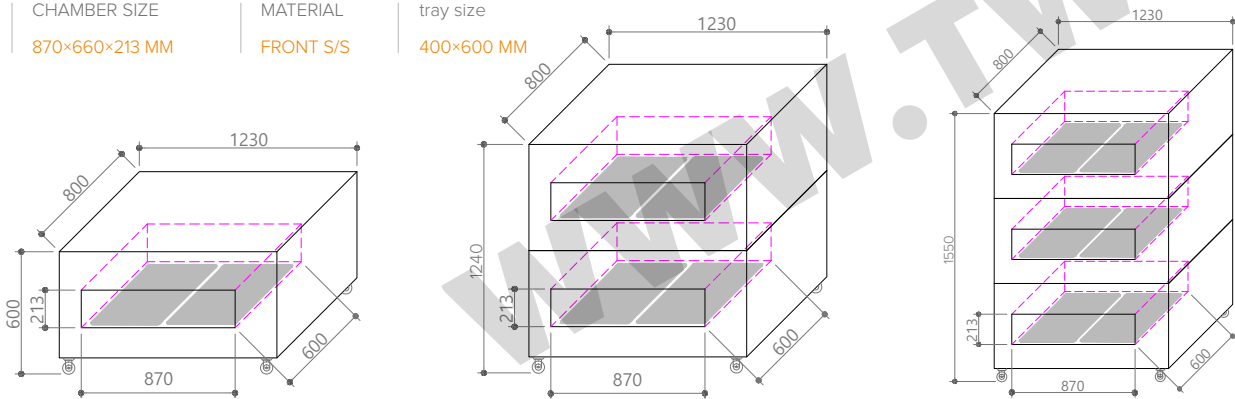

Model	TT-O119B	TT-O120	TT-O121A
DECK	1 DECK	2 DECKS	3 DECKS
TRAY	2 TRAYS	4 TRAYS	6 TRAYS
SIZE	1230×800×600 MM	1230×800×1240 MM	1230×800×1550 MM
Voltage	220 V	3 N - 380 V	3 N - 380 V
POWER	6.5 Kw	13 Kw	19.5 Kw
WEIGHT	78 Kg	145 Kg	188 Kg

BIG CAPACITY DECK OVEN




MATERIAL
FRONT S/S

tray size
400×600 MM

temperature
MAX. 350 °C

3 DECKS 9 TRAYS



Model	TT-O121B	TT-O84
DECK	3 DECKS	3 DECKS
TRAY	9 TRAYS	9 TRAYS
SIZE	1670×800×1550 MM	1750×870×1705 MM
Voltage	3 N - 380 V	3 N - 380 V
POWER	25.2 Kw	25.0 Kw
WEIGHT	288 Kg	318 Kg

HEAT WIRE
DECK OVEN




CHAMBER SIZE
1270×820×200 MM

tray size
400×600 MM
460×720 MM

- Heating wire type
- Germany electronic parts
- Imported aluminized board

HEATING WIRE
FOR BETTER BAKING EFFECT



3 DECKS
6 TRAYS



3 DECKS
9 TRAYS



DIGITAL PANEL		MANUAL PANEL	
Model	TT-O35	TT-O200	
TRAYS layout			
SIZE	1510×1155×1930 MM	1900×1155×1930 MM	
Voltage	3 N - 380 V	3 N - 380 V	
POWER	19.2 Kw	27 Kw	
WEIGHT	650 Kg	750 Kg	

BIG CAPACITY DECK OVEN



TEMP.
350°C

MATERIAL
S/S

tray size
400×600 MM 460×720 MM

3 DECKS
12 TRAYS



3 DECKS
9 TRAYS



Model	TT-O201	TT-O85
SIZE	1940×1420×2100 MM	1750×925×1730 MM
Voltage	3 N - 220 V	3 N - 220 V
POWER	0.3 Kw	0.225 kw
WEIGHT	800 Kg	690 Kg
gas consumption	1.8 kg / h	1.5 kg / h

GLASS DOOR PROOFER

WITH FOAMING INSULATION





6 sides FOAMING INSULATION



ELEC.

FOAMING INSULATION

MATEIRAL
ALL S/S
VOLTAGE
220 V 50 Hz
TEMPERATURE
+35 / +40°C
HUMIDITY
80 - 85%



Model	TT-O162C	TT-O164C
DOOR	1 DOOR	2 DOORS
TRAYS	15 TRAYS	30 TRAYS
POWER	2 Kw	2.8 Kw
SIZE	630×810×1941 MM	1140×820×1960 MM
WEIGHT	36 Kg	66 Kg

STAINLESS STEEL DOOR PROOFER



ELEC.

MATEIRAL
All S/S
VOLTAGE
220 V 50 Hz
TEMPERATURE
+30 / +40°C
HUMIDITY
80 - 85%

DIGITAL CONTROL



CE



CE





Model	TT-O143C	TT-O143D
DOOR	1 DOOR	2 DOORS
TRAY	16 TRAYS	32 TRAYS
POWER	2.8 Kw	3.6 Kw
Weight	180 Kg	298 Kg
SIZE	650×900×2200 MM	1220×900×2200 MM

NO FOAMING INSULATION



ELEC.

FOAMING INSULATION IS NOT REQUIRED IN THE TROPICS
AMBIENT TEMP. +35 °C ABOVE

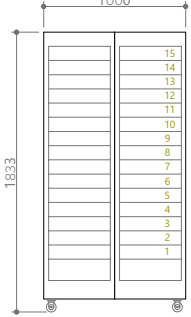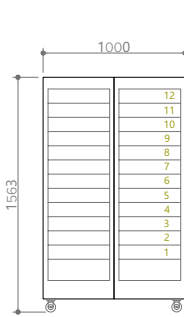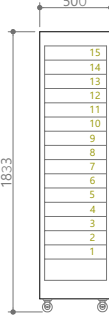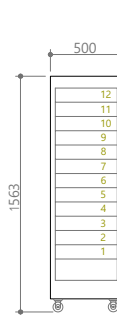

Model	TT-O161B	TT-O162B	TT-O163B	TT-O164B
DOOR	1 DOOR	1 DOOR	2 DOORS	2 DOORS
TRAYS	12 TRAYS	15 TRAYS	24 TRAYS	30 TRAYS
POWER	2 Kw	2 Kw	2.8 Kw	2.8 Kw
SIZE	500×720×1563 MM	500×720×1833 MM	1000×720×1563 MM	1000×720×1833 MM
WEIGHT	32 Kg	36 Kg	58 Kg	66 Kg

TUNNEL OVEN

ELECTRIC
TUNNEL OVEN




SIZE
CUSTOMIZED

- 1 All stainless steel body
- 2 Carbonized steel chains, high temperature resistance
- 3 Over temperature alarm system
- 4 Infrared waves make heat go through food effectively
- 5 Heating zone by zone to reduce the impact on power network
- 6 Europe standard plastic and insulation
- 7 Taiwan metal ceramic tubes

MODEL	TT-TF30
voltage	380 V / 3 PH
POWER	18 Kw / H
chamber size	1400×680 MM
TRAY width	400 MM
TRAYS INPUT	2 Trays / time

GAS
TUNNEL OVEN



SIZE
CUSTOMIZED

- 1 Automatic low and high gas pressure detection
- 2 Over temperature alarm system
- 3 Forced air flows before igniting
- 4 Anti-back fire protection
- 5 Heating with large diameter burning tubes directly
- 6 Diameter of burning tube is 32mm
- 7 Working under pipe-lining operation
- 8 Equipped with PLC control system

MODEL	TT-TF31
HEAT LOAD	12000 Caloric / Kg
GAS CONSUMPTION	0.9 M³ / Hour
CHAMBER size	1400×680 MM
TRAY SIZE	400×600 MM
TRAY INPUT	2 Trays / Time

ROTARY RACK OVEN

TANDOOR OVEN

ROTARY RACK OVEN



2 trolleys
2 trolleys free of charge

64 trays
CAN BE CUSTOMIZED

Germany imported controlling part

With **steam** generating system

Full stainless steel body

Head mounted burner system

Only need **one person** to operate

Controller

Multifunction

380 V 50 Hz

400×600 MM

2 trolleys
2 trolleys free of charge

TROLLEY: 450X650X1800 MM

16 trays

			
Model	TT-RF21E	TT-RF21G	TT-RF21O
ENERGY	Electric	Gas	Diesel
POWER	35 Kw	5 Kw / 7 Kg / h	5 Kw / 6 Kg / h
size	1900×1400×2500 MM	1900×1400×2500 MM	1900×1400×2500 MM

			
Model	TT-RF32E	TT-RF32G	TT-RF32O
ENERGY	Electric	Gas	Diesel
POWER	51 Kw	5 Kw / 8 Kg / h	5 Kw / 7 Kg / h
size	2550×1600×2500 MM	2550×1600×2500 MM	2550×1600×2500 MM

ELECTRIC TANDOOR OVEN



VOLTAGE	temperature	CHAMBER MATERIAL
220 V 50 Hz	250°C - 400°C	ALUMINIUM

- On Castors
- Stainless Steel Heating Element
- **Stainless steel** body



Control Pannel

Model	TT-TO01E	TT-TO02E	TT-TO03E
Power	15 kw	6 kw	3 kw
Size	1150×1150×1000 mm	800×800×800 mm	600×600×840 mm

With glass lid
BACK WHEEL WITH BRAKE

GAS TANDOOR OVEN



- On Castors
- **Stainless steel** body
- Use **LPG** or **NG**
- **Infrared** Heating
- temperature
250°C - 400°C



					
Model	TT-TO01G	TT-TO02G	TT-TO03G	TT-TO04G	TT-TO05G
size	900×900×1040 MM	dia 560×810 MM	1150×1150×1000 MM	600×600×830 MM	600×600×800 MM
weight	340 kg	150 kg	/	170 kg	/
Burner	71031 BTU	71031 BTU	infrared ceramic	71031 BTU	infrared ceramic
S/S fork	3 pcs	3 pcs	/	3 pcs	/
chamber material	mud	mud	aluminium	mud	aluminium

CONVECTION OVEN

- Stainless steel body
- Clear glass door
- Micro-electronic control
- 43% energy savings
- Adjustable chamber rack height
- Adjustable air speed

MATERIAL
All S/S

TEMPERATURE
Max. 300 °C

FUNCTION
Auto spraying system

PAN SIZE
600×400 MM



TT-O228B
TT-gO228a



TT-O228c
TT-gO228b



TT-O228d
TT-gO228c



Model	TT-O228B	TT-GO228A	TT-O228C	TT-GO228B	TT-O228D	TT-GO228C
Trays	5	5	8	8	10	10
size (MM)	900×1270×770	900×1320×940	900×1250×1270	900×1380×1420	900×1300×1470	900×1380×1640
WEIGHT	200 Kg	200 Kg	280 Kg	300 Kg	300 Kg	330 Kg
VOLTAGE	380 V 50 Hz	220 V 50 Hz	380 V 50 Hz	220 V 50 Hz	380 V 50 Hz	220 V 50 Hz
POWER	7.5 kw	0.65 Kw	14.5 kw	1.3 Kw	14.5 Kw	1.3 Kw

MATERIAL
All S/S

TEMPERATURE
Max. 300 °C

FUNCTION
Auto spraying system

PAN SIZE
600×400 MM



ELECTRIC



GAS

Model	TT-O226B	TT-GO226B	TT-O226C	TT-GO226C	TT-O226E
Trays	5	5	10	10	12
size (MM)	1320×930×850	1420×930×1100	1320×930×1550	1420×930×1840	1420×930×2000
WEIGHT	160 Kg	175 Kg	220 Kg	260 Kg	300 Kg
VOLTAGE	380 V	220 V 50 Hz	380 V	220 V 50 Hz	380 V
POWER	9 kw	0.5 Kw	18 kw	0.9 Kw	18 Kw / 0.8 KW

- Double thermo-glazed door to insulate
- Stainless steel construction
- Heat insulated sheets
- Vortex flow fan and humidity function

TEMPERATURE
Max 300 °C

VOLTAGE
220V 50HZ



Stainless STEEL chamber



enamel chamber



Stainless STEEL chamber with upper fire



Model	TT-O130	TT-O131	TT-O131A	TT-O169
chamber material	STAINLESS STEEL	STAINLESS STEEL	enamel	STAINLESS STEEL
chamber size	700×460×360 MM	460×375×360 MM	460×375×360 MM	460×375×360 MM
DIMENSION	834×672×572 MM	595×570×530 MM	595×570×530 MM	595×570×530 MM
POWER	6.4 kw	2.67 kw	2.67 kw	2.67 kw + 2 kw
heating elements	2 pieces	2 pieces	2 pieces	3 pieces
fans	2 pieces	2 pieces	2 pieces	2 pieces
tray size	600×400 mm	454×327 mm	454×327 mm	454×327 mm

ELECTRIC SALAMANDER



- Adjustable movable top
- Pull-out bottom tray
- Stainless steel body
- Infrared heating

VOLTAGE
220 V

FREQUENCY
50 - 60 Hz

TEMPERATURE
MAX. 300 °C

ADJUSTABLE HEIGHT
0-140 MM

1 temperature controller and 1 heating area

2 temperature controllers and two independent heating areas

MODEL	TT-WE200A	TT-WE200C
POWER	2.8 Kw	5.6 Kw
heating AREA	440×320 MM	790×320 MM
WEIGHT	38.5 Kg	63 Kg
size	450×450×500 MM	800×450×500 MM

VOLTAGE
220 V



Model	TT-WE113B	TT-WE189
POWER	2 Kw	3.2 Kw
weight	17 Kg	9 Kg
SIZE	570×340×260 MM	490×280×370 MM

TROLLEY

TRAY TROLLEY FOR 400X600 BAKERY PAN

SHORT
TROLLEY





BRACKET OPTION



"N" SHAPE



"L" SHAPE



MODEL	TT-SP270A	TT-SP270A-1	TT-SP270B	TT-SP270B-1	TT-SP270C	TT-SP270C-1
LAYERS	6	10	6	10	6	10
TRAY	6 Pans	10 Pans	6 Pans	10 Pans	6 Pans	10 Pans
S/S THICKNESS	1 mm	1 mm	1 mm	1 mm	1.5 mm	1.5 mm
Size (mm)	470×620×1000	470×620×1300	470×620×1000	470×620×1300	470×620×1000	470×620×1300
BRACKET SHAPE	"N" SHAPE	"N" SHAPE	"L" SHAPE	"L" SHAPE	"L" SHAPE	"L" SHAPE



Size
470×620×1735 MM



BRACKET OPTION




"N" SHAPE



"L" SHAPE



MODEL	TT-SP271A	TT-SP271B	TT-SP271C	TT-SP272A	TT-SP272B	TT-SP272C
LAYERS	15	15	15	16	16	16
TRAY	15 Pans	15 Pans	15 Pans	16 Pans	16 Pans	16 Pans
S/S THICKNESS	1 mm	1 mm	1.5 mm	1 mm	1 mm	1.5 mm
BRACKET SHAPE	"N" SHAPE	"L" SHAPE	"L" SHAPE	"N" SHAPE	"L" SHAPE	"L" SHAPE



MODEL	TT-SP273A	TT-SP273B	TT-SP274A	TT-SP274B	TT-SP280A	TT-SP280B	TT-SP281A	TT-SP281B
LAYERS	15	15	16	16	10	10	6	6
TRAY	30 Pans	30 Pans	32 Pans	32 Pans	20 Pans	20 Pans	12 Pans	12 Pans
S/S THICKNESS	1 mm	1.5 mm	1 mm	1.5 mm	1 mm	1.5 mm	1 mm	1.5 mm
Size (mm)	920×620×1735	920×620×1735	920×620×1735	920×620×1735	920×620×1300	920×620×1300	920×620×1000	920×620×1000

TRAY TROLLEY FOR G/N PAN

SHORT TROLLEY

S/S THICKNESS
1 mm



"N" SHAPE



TT-SP279A/B/C



TT-SP279D



TT-SP279E

MODEL	TT-SP279A	TT-SP279B	TT-SP279C	TT-SP279D	TT-SP279E
LAYERS	6	6	10	6	6
TARY	GN1/1 Pan X 6 PANS	GN2/1 Pan X 6 PANS	GN1/1 Pan X 10 PANS	GN1/1 Pan X 12 PANS	GN2/1 Pan X6 PANS
Size (mm)	380×550×1000	590×670×1000	380×550×1300	740×550×1000	595×665×1150

HIGH TROLLEY

S/S THICKNESS
1 mm



"N" SHAPE



TT-SP275/276

TT-SP278A/B



TT-SP278C/D

MODEL	TT-SP275	TT-SP276	TT-SP278A	TT-SP278B	TT-SP278C	TT-SP278D
LAYERS	15	15	16	16	15	16
TRAY	GN2/1 X 15 PANS	GN1/1 X 15 PANS	GN1/1 X 16 PANS	GN2/1 X 16 PANS	GN1/1 X 30 PANS	GN1/1 X 32 PANS
Size (mm)	590×670×1735	380×550×1735	380×550×1735	590×670×1735	740×550×1735	740×550×1735

DINNING CART



TT-BU100



TT-BU102



TT-BU119

Disassembled stainless steel three-layers dining cart.

material
stainless steel

MODEL	TT-BU100A	TT-BU100B	TT-BU100C	TT-BU102A	TT-BU102B	TT-BU119A	TT-BU119B	TT-BU119C
Size (mm)	950×500×950	850×450×900	750×400×835	860×540×940	810×460×850	950×500×950	850×450×900	750×400×835



TT-BU104



TT-BU105



TT-BU112

MODEL	TT-BU104A	TT-BU104B	TT-BU104C	TT-BU105A	TT-BU105B	TT-BU105C	TT-BU112
Size (mm)	950×500×950	850×450×900	750×400×835	950×500×950	850×450×900	750×400×835	850×450×900



TT-BU101



TT-BU103



TT-BU118

MODEL	TT-BU101A	TT-BU101B	TT-BU101C	TT-BU103A	TT-BU103B	TT-BU118A	TT-BU118B	TT-BU118C
Size (mm)	950×500×950	850×450×900	750×400×835	860×540×940	810×460×850	950×500×950	850×450×900	750×400×835



MODEL	TT-BU114A	TT-BU114B
Size	900×460×950 mm	850×450×900 mm

Disassembled stainless steel four-layers dining cart.

Disassembled stainless steel four-layers hot pot cart.

Stainless steel flat cart



TT-BU117



TT-BU116



TT-BU106A

TT-BU106B

MODEL	TT-BU117	TT-BU116	TT-BU106a	TT-BU106b
Size	860×540×1250 mm	480×320×800 mm	900×550×870 mm	820×520×970 mm



TT-BU110



TT-BU111




TT-BU113

MODEL	TT-BU110A	TT-BU110B	TT-BU110C	TT-BU111	TT-BU113
Size	950×500×950 mm	850×450×900 mm	750×400×835 mm	φ400×715 mm	850×450×900 mm

WORKING TABLE


CIRCULAR TUBE 1-TIER WORKTABLE WITHOUT SPLASHBACK

FOAMING BENCH TOP

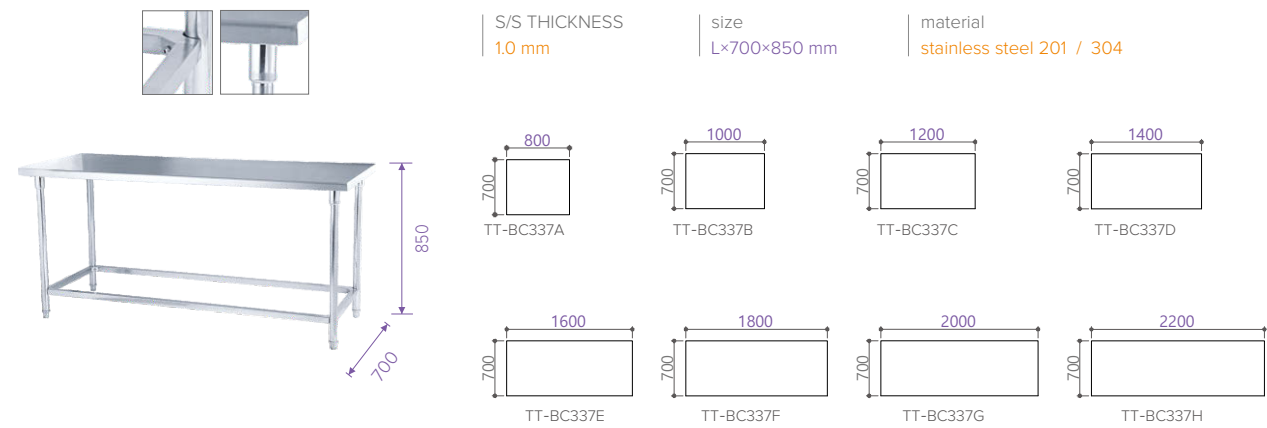


CIRCULAR TUBE 1-TIER WORKTABLE WITH SPLASHBACK

FOAMING BENCH TOP

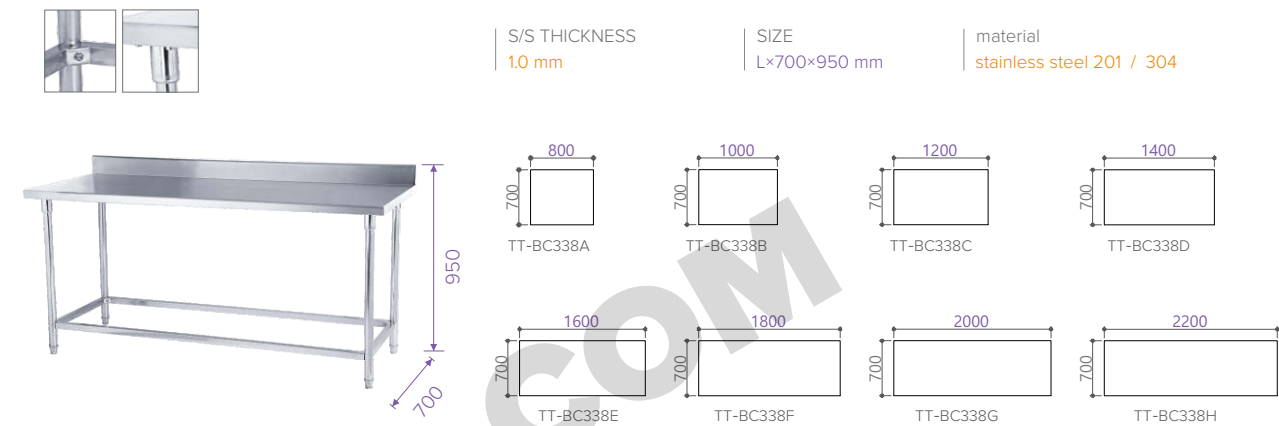


CIRCULAR TUBE 2-TIER WORKTABLE WITHOUT SPLASHBACK

FOAMING BENCH TOP

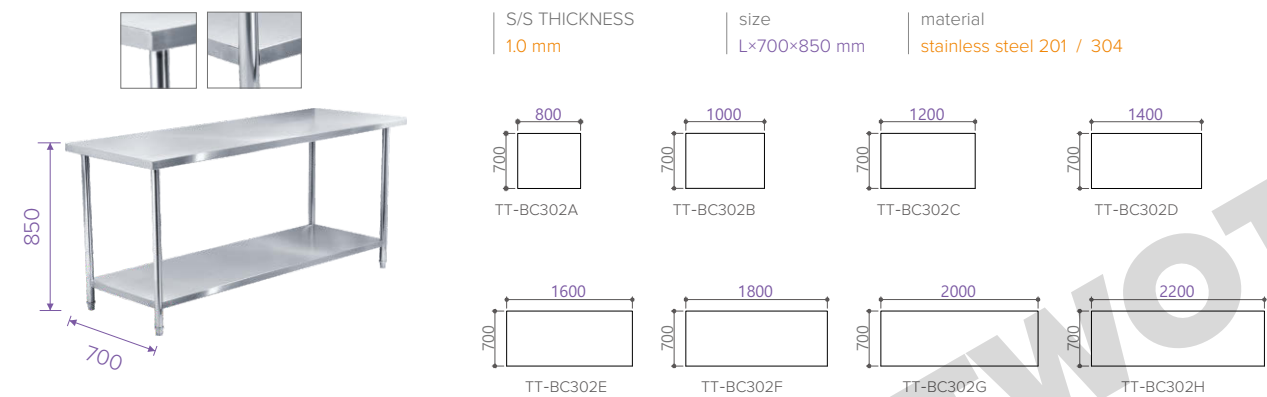


CIRCULAR TUBE 2-TIER WORKTABLE WITH SPLASHBACK

FOAMING BENCH TOP

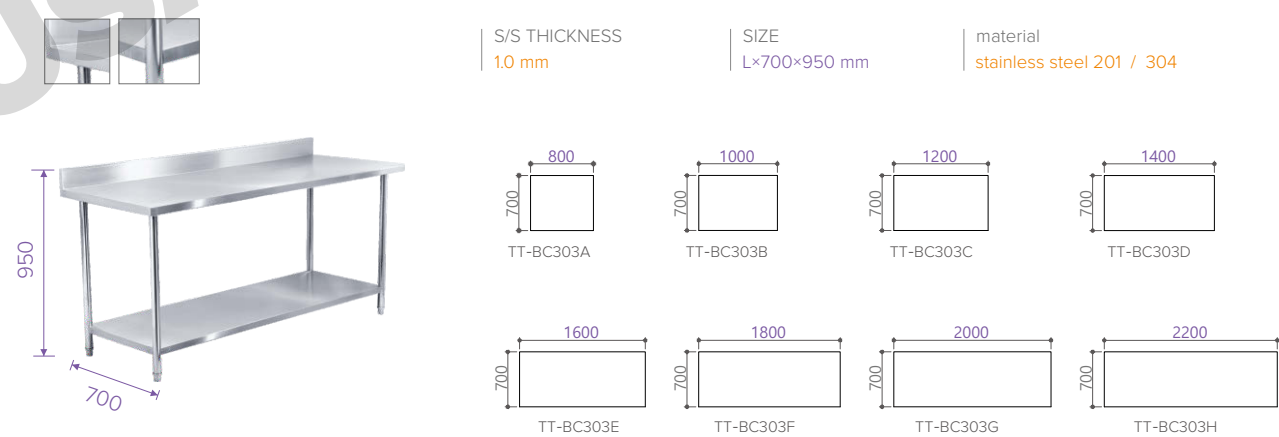


SQUARE TUBE 2-TIER WORKTABLE WITHOUT SPLASHBACK

FOAMING BENCH TOP

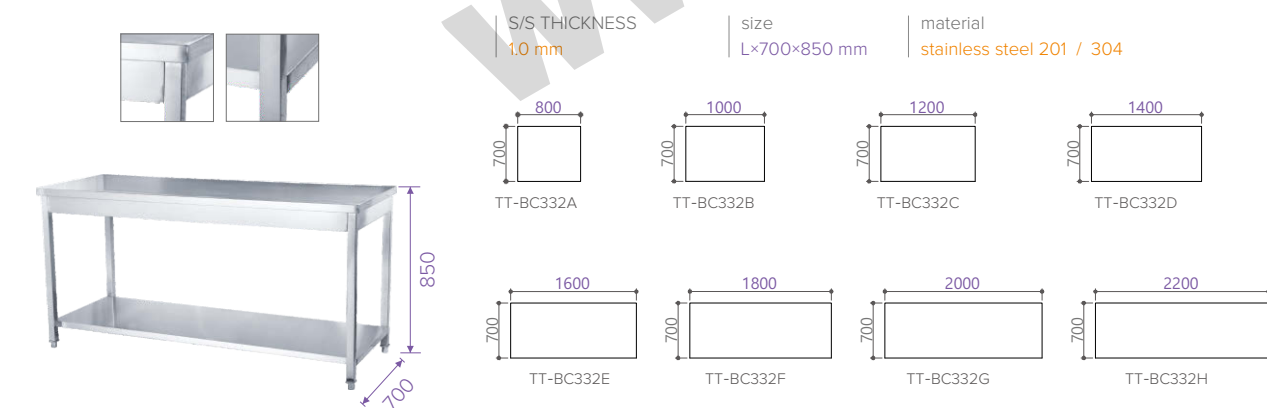

SQUARE TUBE 2-TIER WORKTABLE WITH SPLASHBACK

FOAMING BENCH TOP

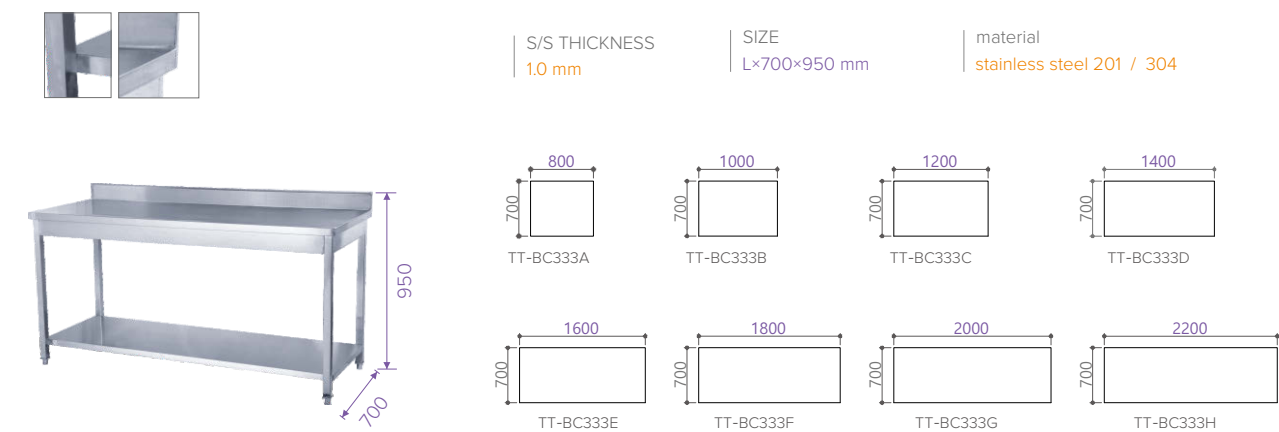


SINK TABLE

SINGLE SINK BENCH




Sink position is available to be customized

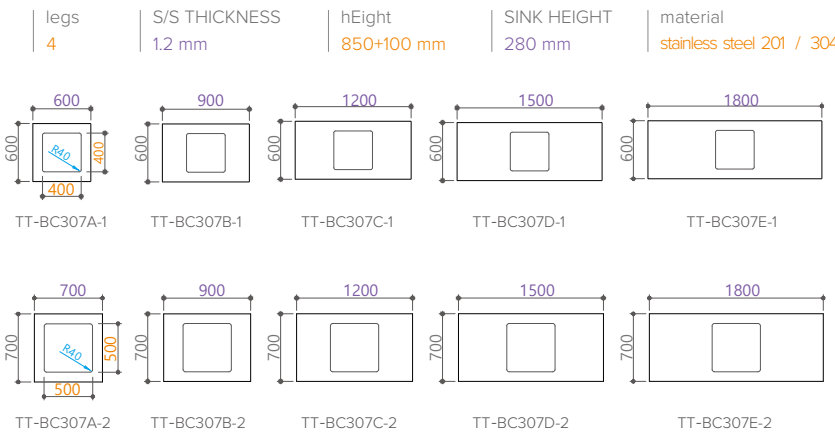

DOUBLE SINK BENCH




Sink position is available to be customized

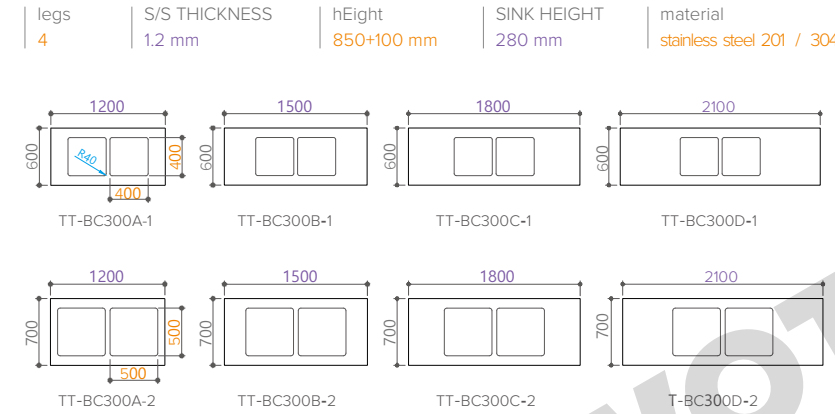

SINGLE SINK BENCH WITH UNDER SHELF




Sink position is available to be customized

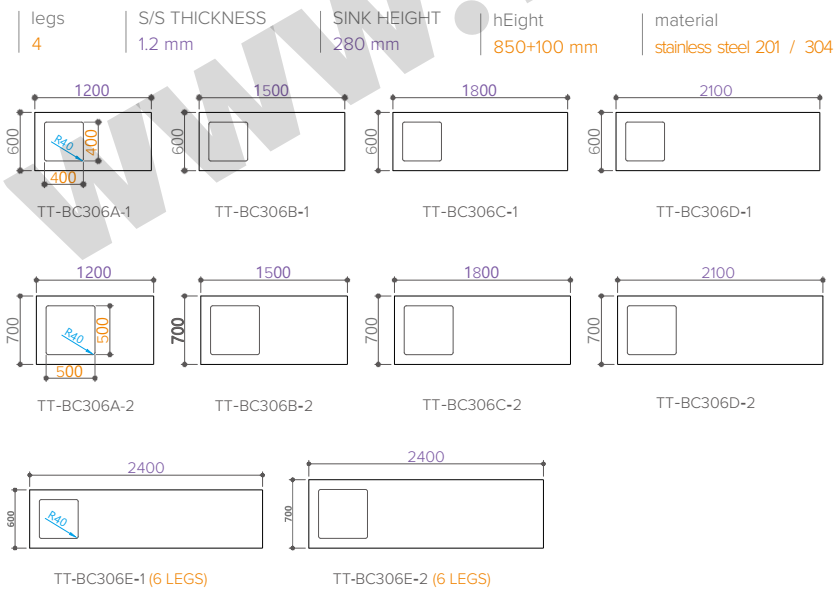


TRIPLE SINK BENCH

Sink position is available to be customized

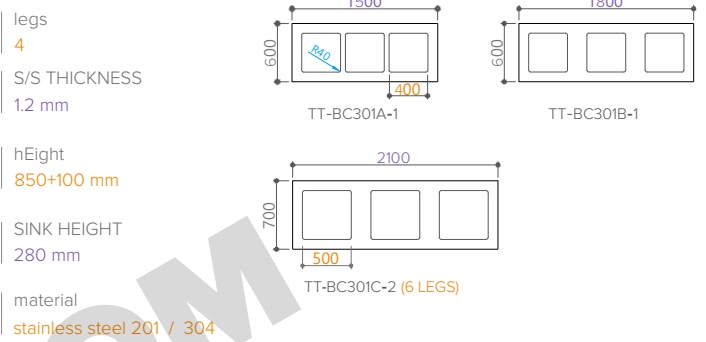

CORNER WORK BENCH WITH SPLASH BACK AND UNDER SHELF

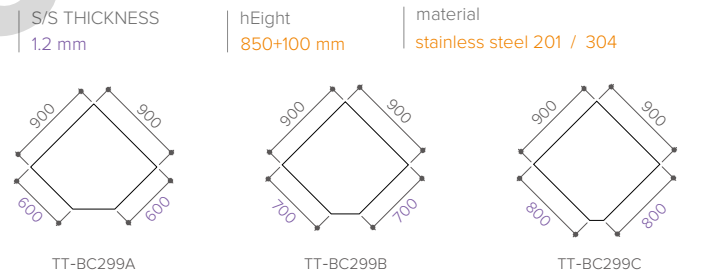


CIRCULAR TUBE 4-TIER LADDER STORAGE RACK

THICKNESS 0.9 MM
1.2 mm for "-1" SERIES

material
stainless steel 201

hEight
1550 mm

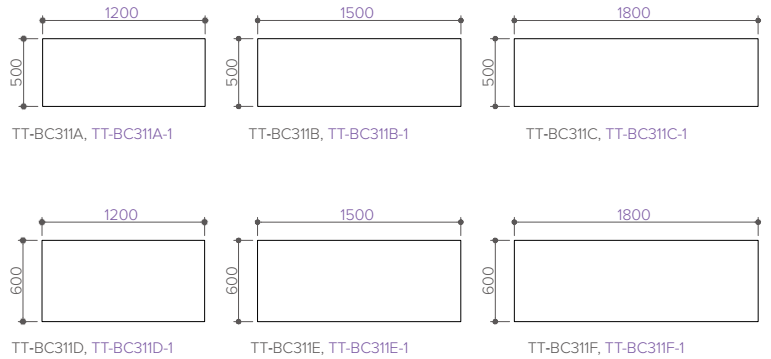


CIRCULAR TUBE 4-TIER PLATE STORAGE RACK


S/S THICKNESS
1.2 mm

hEight
1550 mm


material
stainless steel 201

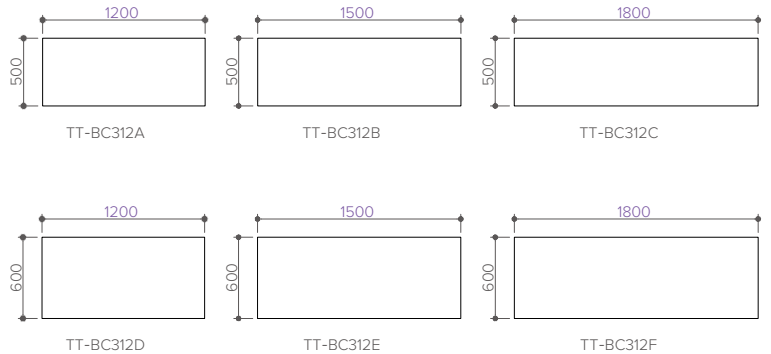

CIRCULAR TUBE 4-TIER PUNCHED-PLATE STORAGE RACK

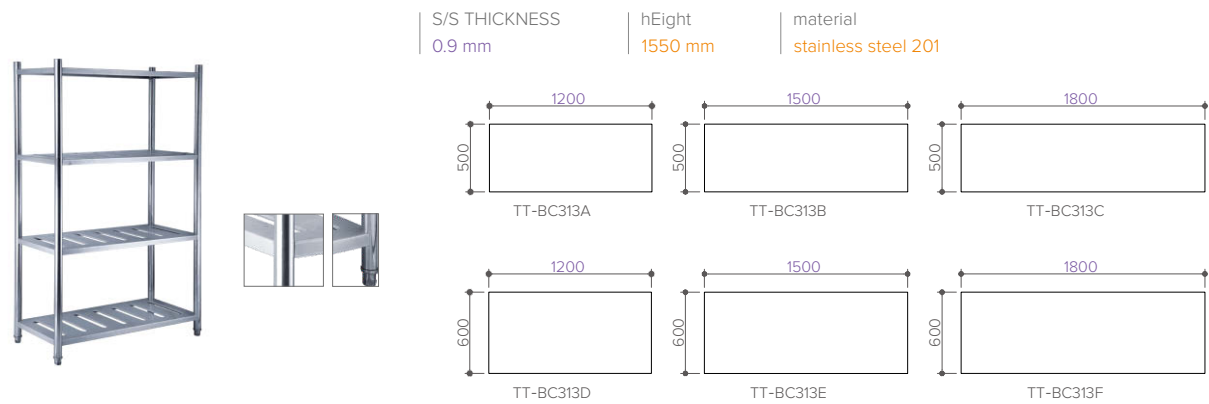


SQUARE TUBE 4-TIER LADDER STORAGE RACK

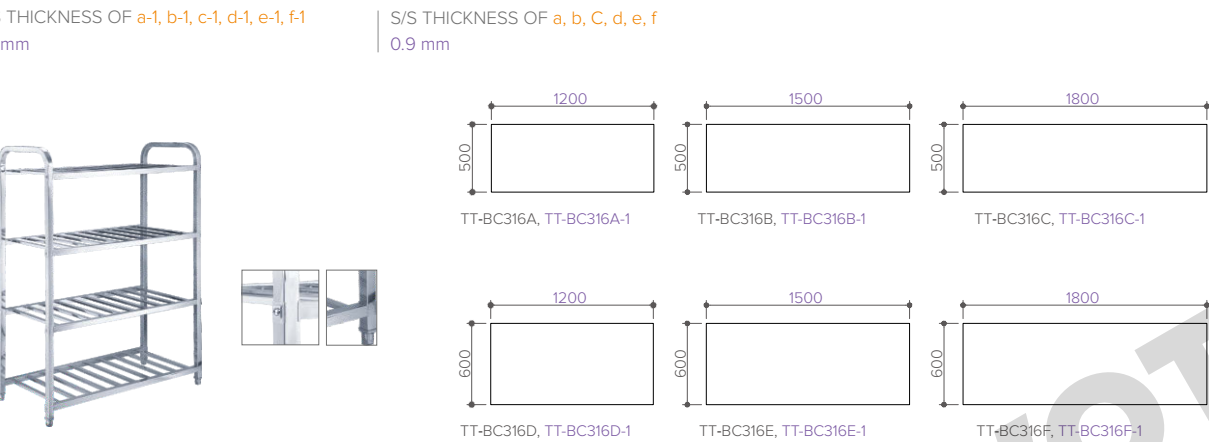


CHROME PLATING STORAGE RACK


DIMENSION CAN BE FREELY ASSEMBLED

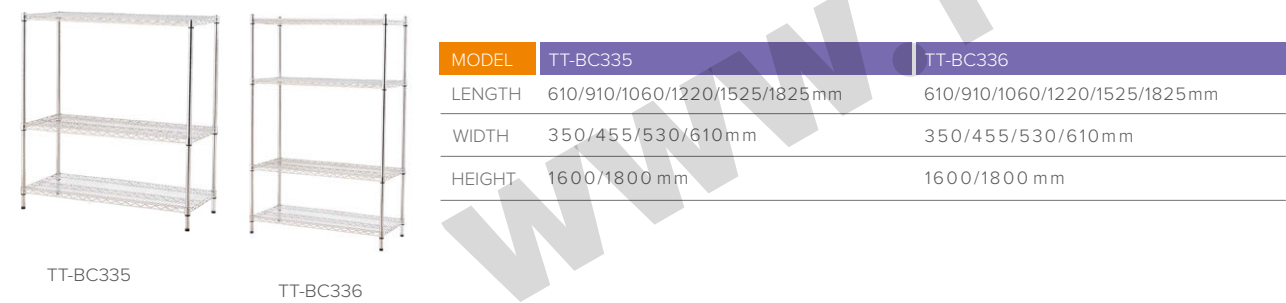


2-TIER WORK BENCH WITH 2-TIER OVER-SHELF

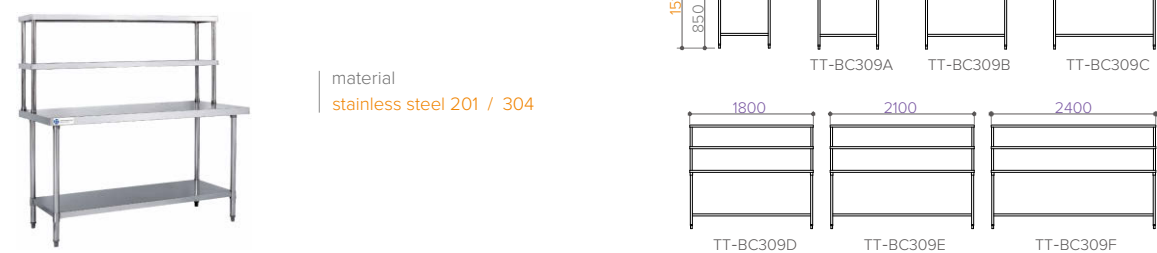


BENCH CABINET WITH SLIDING DOORS AND BACKSPLASH

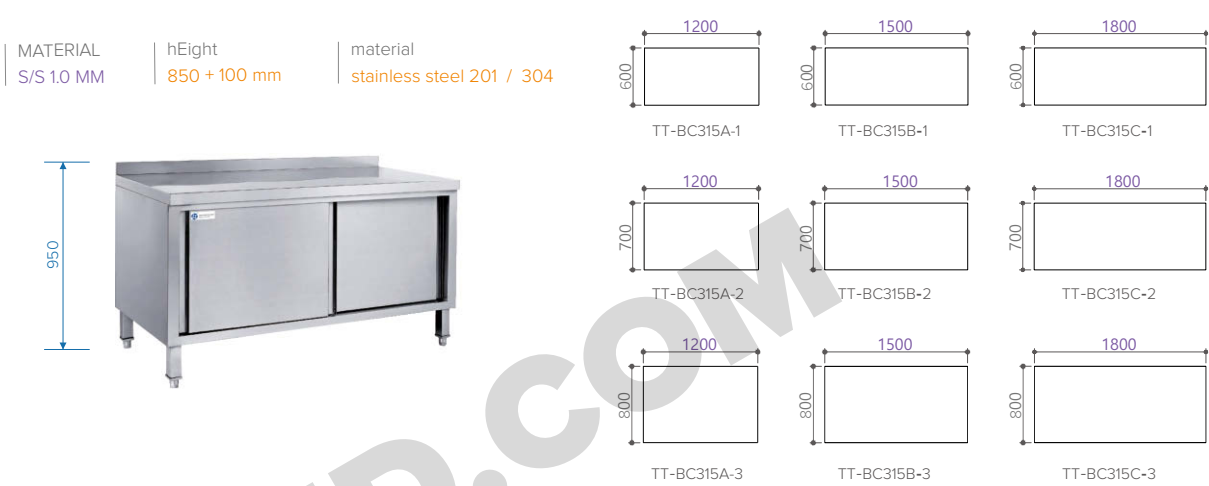


BENCH CABINET WITH DRAWERS

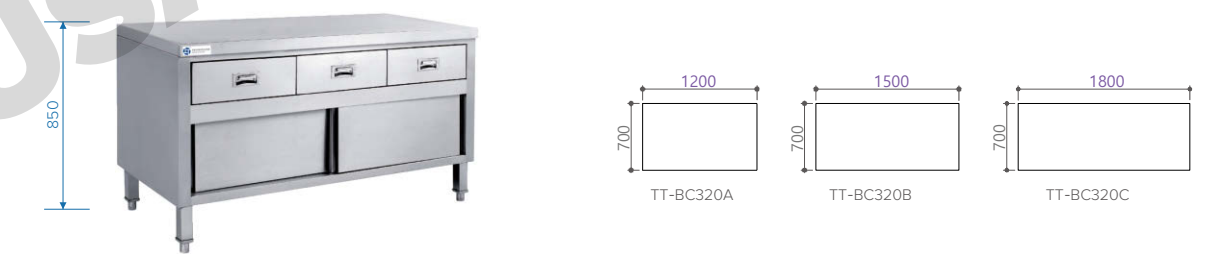

WALL CABINET WITH SLIDING DOORS

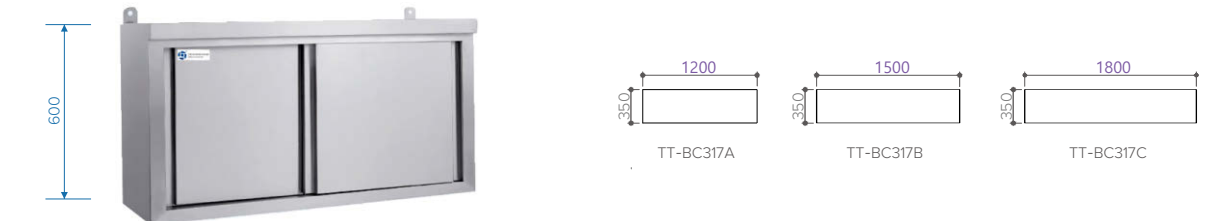

WALL SHELF

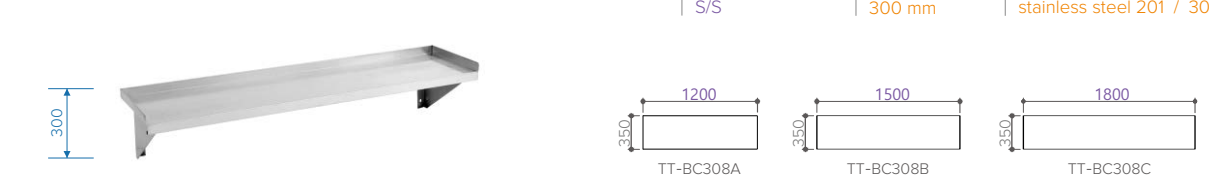

CABINET

BENCH CABINET WITH SLIDING DOORS

Electric warming system can be added onto this product.



MATERIAL S/S 1.0 MM	hEight 850 mm	material stainless steel 201 / 304
TT-BC314A-1	TT-BC314B-1	TT-BC314C-1
TT-BC314A-2	TT-BC314B-2	TT-BC314C-2

BENCH CABINET WITH DRAWERS AND OVER-SHELVES



MATERIAL S/S 1.0 MM	hEight 850+1000 mm	material stainless steel 201 / 304
TT-BC321A	TT-BC321B	TT-BC321C

UPRIGHT STORAGE CABINET WITH SLIDING DOORS



MATERIAL S/S 1.0 MM	hEight 1800 mm	material stainless steel 201 / 304
TT-BC318A	TT-BC318B	

SMOKE HOOD



LENGTH IS
CUSTOMIZED

Two kinds of silent oil
net are available to choose



Model	TT-H01	TT-H02	TT-H03	TT-H04
name	English Style	English Style	Normal Hood	Two Sides Hood
Size	LENGTH×1200×600 MM	LENGTH×1200×730 MM	LENGTH×1200×600 MM	LENGTH×1600×500 MM

GASTRONOME Pan



gN 1/3			MOQ 1 CTN (18 PCS/CTN)
MODEL	ITEM	Size	
TT-813-20	1/3×0.8"	325×176×20 mm	
TT-813-40	1/3×1.6"	325×176×40 mm	
TT-813-55	1/3×2.2"	325×176×55 mm	
TT-813-2	1/3×2.5"	325×176×65 mm	
TT-813-4	1/3×4"	325×176×100 mm	
TT-813-6	1/3×6"	325×176×150 mm	
TT-813-8	1/3×8"	325×176×200 mm	
TT-813-L	1/3 Cover	325×176 mm	

gN 1/4			MOQ 1 CTN (24 PCS/CTN)
MODEL	ITEM	Size	
TT-814-20	1/4×0.8"	265×162×20 mm	
TT-814-40	1/4×1.6"	265×162×40 mm	
TT-814-55	1/4×2.2"	265×162×55 mm	
TT-814-2	1/4×2.5"	265×162×65 mm	
TT-814-4	1/4×4"	265×162×100 mm	
TT-814-6	1/4×6"	265×162×150 mm	
TT-814-8	1/4×8"	265×162×200 mm	
TT-814-L	1/4 Cover	265×162 mm	

gN 1/6			MOQ 1 CTN (36 PCS/CTN)
MODEL	ITEM	Size	
TT-816-2	1/6×2.5"	176×162×65 mm	
TT-816-4	1/6×4"	176×162×100 mm	
TT-816-6	1/6×6"	176×162×150 mm	
TT-816-8	1/6×8"	176×162×200 mm	
TT-816-L	1/6 Cover	176×162 mm	

gN 1/9			MOQ 1 CTN (48 PCS/CTN)
MODEL	ITEM	Size	
TT-819-2	1/9×2.5"	176×108×65 mm	
TT-819-4	1/9×4"	176×108×100 mm	
TT-819-6	1/9×6"	176×108×150 mm	
TT-819-L	1/9 Cover	176×108 mm	

gN 2/1			MOQ 1 CTN (6 PCS/CTN)
MODEL	ITEM	Size	
TT-821-20	2/1×0.8"	650×530×20 mm	
TT-821-40	2/1×1.6"	650×530×40 mm	
TT-821-55	2/1×2.2"	650×530×55 mm	
TT-821-2	2/1×2.5"	650×530×65 mm	
TT-821-4	2/1×4"	650×530×100 mm	
TT-821-6	2/1×6"	650×530×150 mm	
TT-821-8	2/1×8"	650×530×200 mm	
TT-821-L	2/1 Cover	650×530 mm	

gN 1/2			MOQ 1 CTN (12 PCS/CTN)
MODEL	ITEM	Size	
TT-812-20	1/2×0.8"	325×265×20 mm	
TT-812-40	1/2×1.6"	325×265×40 mm	
TT-812-55	1/2×2.2"	325×265×55 mm	
TT-812-2	1/2×2.5"	325×265×65 mm	
TT-812-4	1/2×4"	325×265×100 mm	
TT-812-6	1/2×6"	325×265×150 mm	
TT-812-8	1/2×8"	325×265×200 mm	
TT-812-L	1/2 Cover	325×265 mm	

gN 1/1			MOQ 1 CTN (6 PCS/CTN)
MODEL	ITEM	Size	
TT-811-20	1/1×0.8"	530×325×20 mm	
TT-811-40	1/1×1.6"	530×325×40 mm	
TT-811-55	1/1×2.2"	530×325×55 mm	
TT-811-2	1/1×2.5"	530×325×65 mm	
TT-811-4	1/1×4"	530×325×100 mm	
TT-811-6	1/1×6"	530×325×150 mm	
TT-811-8	1/1×8"	530×325×200 mm	
TT-811-L	1/1 Cover	530×325 mm	

gN 2/3			MOQ 1 CTN (12 PCS/CTN)
MODEL	ITEM	Size	
TT-823-20	2/3×0.8"	355×325×20 mm	
TT-823-40	2/3×1.6"	355×325×40 mm	
TT-823-55	2/3×2.2"	355×325×55 mm	
TT-823-2	2/3×2.5"	355×325×65 mm	
TT-823-4	2/3×4"	355×325×100 mm	
TT-823-6	2/3×6"	355×325×150 mm	
TT-823-8	2/3×8"	355×325×200 mm	
TT-823-L	2/3 Cover	355×325 mm	

BUFFET UTENSIL



MODEL	TT-10100-1	TT-10100-2	TT-10200-1	TT-10200-2
Size	270×350×560 mm	270×350×560 mm	570×350×600 mm	570×350×600 mm
MATERIAL	Gilt	S/S	Gilt	S/S



MODEL	TT-10300-1	TT-10300-2
Size	850×350×600 mm	850×350×600 mm
MATERIAL	Gilt	S/S



MODEL	TT-10500-1	TT-10600	TT-10400-1	TT-10400-2
Size	Dia. 270×600 mm	dia. 270×600 mm	270×350×560 mm	270×350×560 mm
MATERIAL	Gilt	S/S	Gilt	S/S

classic chafing dish

S/S 201 material

For more various models and accessories please go to www.twothousand.com/chafe-dish



MODEL	TT-CD-731GH	TT-CD-723BGH	TT-CD-721BGH
Size	515×515×485 mm	675×530×445 mm	480×520×450 mm
capacity	6 L	9 l	6 l
water pan thickness	0.6 mm	0.6 mm	0.7 mm
food pan thickness	0.7 mm	0.6 mm	0.7 mm
cover thickness	0.9 mm	0.8 mm	0.8 mm



MODEL	TT-CD-723	TT-CD-721	TT-CD-723W	TT-CD-733	TT-CD-731
Size	675×530×445 mm	480×520×450 mm	640×500×440 mm	740×460×410 mm	515×515×485 mm
capacity	9 L	6 l	9 l	9 l	6 l
water pan thickness	0.6 mm	0.7 mm	0.6 mm	0.6 mm	0.6 mm
food pan thickness	0.6 mm	0.7 mm	0.6 mm	0.6 mm	0.7 mm
cover thickness	0.8 mm	0.8 mm	0.7 mm	0.9 mm	0.9 mm



MODEL	TT-CD-736	TT-CD-836	TT-CD-633-01	TT-CD-433-01	TT-CD-JQ533-01
Size	650×550×460 mm	560×305×280 mm	600×350×320 mm	600×350×320 mm	580×355×315 mm
capacity	9 L	5.5 l	9 l	9 l	9 l
water pan thickness	0.6 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
food pan thickness	0.6 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
cover thickness	0.8 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm

MECHANICAL HINGED chafing dish

- Mechanical hinge
- Transparent glass cover
- Stainless Steel



INDUCTION READY



Chafing pan is able to be heated by induction cooker



Induction cooker is available



Heating plate is available



To buy the accessories please go to www.twothousand.com/chafe-dish

- Cover stay open at 90° , cover will close silently and automatically if lower than 90°



TT-CD-Y1011BL



TT-CD-Y1032BL



TT-CD-Y1060BL

MODEL	TT-CD-Y1011BL	TT-CD-Y1032BL	TT-CD-Y1060BL
Size	585×455×260 mm	400×440×260 mm	4400×480×260 mm
capacity	9 L	5.5 l	6 l

- Cover stay open at any angle
- Stainless Steel Cover



TT-CD-1011B



TT-CD-1060B



TT-CD-1032B



TT-CD-1021B

MODEL	TT-CD-1011B	TT-CD-1060B	TT-CD-1032B	TT-CD-1021B
Size	590×460×335 mm	520×455×345 mm	455×410×340 mm	455×320×340 mm
capacity	9 L	6 l	5.5 l	4 l

- Cover stay open at any angle
- Transparent Glass Cover



TT-CD-1011BL



TT-CD-1060BL



TT-CD-1032BL



TT-CD-1021BL

MODEL	TT-CD-1011BL	TT-CD-1060BL	TT-CD-1032BL	TT-CD-1021BL
Size	590×460×335 mm	520×455×345 mm	455×410×340 mm	455×320×340 mm
capacity	9 L	6 l	5.5 l	4 l

HYDRAULIC HINGED chafing dish

HYDRAULIC HINGE

- Hydraulic hinge
- Stay at 70° or 90°



Induction cooker is available



To buy the accessories please go to www.twothousand.com/chafe-dish



INDUCTION READY



Chafing pan is able to be heated by induction cooker

LID POSITION
OPEN UP TO MAXIMUM 90°
STAYS OPEN AT 60°
INITIATE TO CLOSE BY PRESSING DOWN GENTLY
LID FALLS & CLOSSES AUTOMATICALLY & SILENTLY

OPTIONAL STAINLESS STEEL OR
PORCELAIN FOOD PAN
PROVIDE DIFFERENT PLATE COMBINATIONS
TO MEET VARIOUS NEEDS

HYDRAULIC HINGE
FOR SMOOTH OPENING & CLOSING LID

CAPSULED BOTTOM
CAPSULE-SANDWICH INDUCTION
BASE FOR FAST & EVEN HEATING

ADJUSTABLE LEVEL SUPPORT
FOR A PERFECTLY LEVEL PLACEMENT
WHEN REQUIRED

- Stainless steel cover
- Stay at 70° or 90°



TT-CD-3011



TT-CD-3032



TT-CD-3021



TT-CD-3060
TT-CD-3040



TT-CD-30-11

MODEL	TT-CD-3011	TT-CD-3032	TT-CD-3021	TT-CD-3060	TT-CD-3040	TT-CD-30-11
capacity	9 L	5.5 l	4 l	6 l	4 l	11 l
chafer size	575×453×214 mm	450×405×215 mm	447×320×210 mm	505×435×217 mm	430×390×218 mm	450×395×345 mm
shelf size	590×385×174 mm	420×380×174 mm	390×325×174 mm	447×447×174 mm	377×377×172 mm	377×377×172 mm

- Transparent glass cover
- Stay at 70° or 90°



TT-CD-3011L



TT-CD-3032L



TT-CD-3021L



TT-CD-3060L
TT-CD-3040L



TT-CD-30-11L

MODEL	TT-CD-3011L	TT-CD-3032L	TT-CD-3021L	TT-CD-3060L	TT-CD-3040L	TT-CD-30-11L
capacity	9 L	5.5 l	4 l	6 l	4 l	11 l
chafer size	575×453×214 mm	450×405×215 mm	447×320×210 mm	505×435×217 mm	430×390×218 mm	450×395×345 mm
shelf size	590×385×174 mm	420×380×174 mm	390×325×174 mm	447×447×174 mm	377×377×172 mm	377×377×172 mm

DISH WASHER

HOOD TYPE DISHWASHER

OPTIONAL ACCESSORIES

- X Entrance & Exit Tables
- X Faucet
- X Dish Sink

voltage
380v / AC / 50HZ



- Mechanical Panel, Easy to Use
- Independent Clean and Spray Arm
- Easy to Clean and Assemble

MODEL	TT-K130	TT-K132
capacity	60 Baskets / hour	120 Baskets / hour
SIZE	640×710×1400 mm	1270×810×1600 mm
CLEAN tank capacity	30 L	60 L
HIGH TEMP RINSE TANK	7 L	25 L
total power	13 Kw	25 Kw

TUNNEL TYPE DISHWASHER

DOUBLE CYLINDER DOUBLE SPRAY

OPTIONAL ACCESSORIES

- X Entrance & Exit Tables
- X Faucet
- X Dish Sink



- Mechanical Panel, Easy to Use
- Independent Clean and Spray Arm
- Easy to Clean and Assemble

MODEL	TT-K131
capacity	250 Baskets / hour
SIZE	4000×780×1920 mm
CLEAN tank capacity	2 X 140 L
HIGH TEMP RINSE TANK	30 L
total power	60 Kw

TUNNEL TYPE DISHWASHER

SINGLE CYLINDER DOUBLE SPRAY

OPTIONAL ACCESSORIES

- X Entrance & Exit Tables
- X Faucet
- X Dish Sink

voltage
380v / AC / 50HZ



- Mechanical Panel, Easy to Use
- Independent Clean and Spray Arm
- Easy to Clean and Assemble

MODEL	TT-K135
capacity	186 Baskets / hour
SIZE	1500×780×1600 mm
CLEAN tank capacity	98 L
HIGH TEMP RINSE TANK	30 L
total power	37.5 Kw

CATERPILLAR TYPE DISHWASHER

DOUBLE CYLINDER DOUBLE SPRAY

OPTIONAL ACCESSORIES

- X Entrance & Exit Tables
- X Faucet
- X Dish Sink



- Mechanical Panel, Easy to Use
- Independent Clean and Spray Arm
- Easy to Clean and Assemble

MODEL	TT-K138
capacity	3000 PCS / hour
SIZE	4500×870×1600 mm
CLEAN tank capacity	2 X 100 L
HIGH TEMP RINSE TANK	50 L
total power	66 Kw


GLASS WASHER

BAR GLASS WASHER



MODEL	TT-K125
SPEED	2500 RPM
POWER	300 w
VOLTAGE	220 V
WEIGHT	7 KG
SIZE	380 X 225 X 520 MM

BAR GLASS DRYER

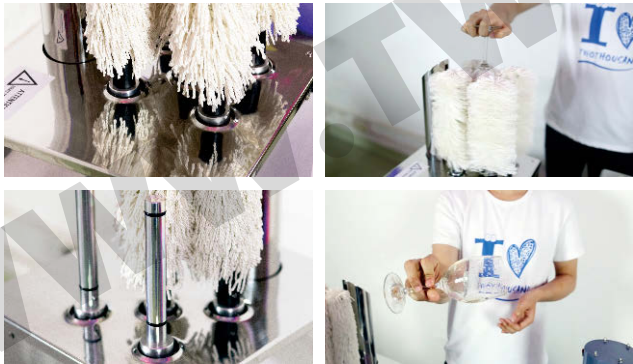

MODEL	TT-K128
MATERIAL	STAINLESS STEEL 304
POWER	1200 w
VOLTAGE	220 V / 110V
WEIGHT	21 KG
SIZE	300 X 340 X 540 MM
BRUSH life	3 months (recommended)

- JAPANESE TOXIC-FREE nano crystal brush
- 5 brushes included
- BELT DRIVE
- WASH UNDER WET STATUS

- ⚠ max. operation time **3 HOURS**
- ⚠ MUST USE THE **23+AMPS** PROXIMITY SWITCH

WATER BOILER

WATER BOILER



- With Meter
- Copper Tap



1 LAYER



HEATING PLATE

voltage
220 V
MATERIAL
S/S 201
S/S THICKNESS
0.4 MM

MODEL	TT-WB10SP	TT-WB15SP	TT-WB20SP	TT-WB30SP	TT-WB40SP
CAPACITY	8.8 L	15 L	20 L	30 L	40 L
POWER	1.6 KW	2 KW	2 KW	2 KW	2.5 KW
Size (mm)	Ø220×430	Ø 270 × 440	Ø 270 × 550	Ø 320 × 550	Ø 320 × 600
weight	8 kg	9.6 kg	10.8 kg	13.2 kg	14.8 kg



1 LAYER



HEATING TUBE

voltage
220 V
MATERIAL
S/S 430
S/S THICKNESS
0.4 MM

MODEL	TT-WB20ST	TT-WB30ST	TT-WB40ST	TT-WB55ST
CAPACITY	15 L	25 L	35 L	50 L
POWER	2 KW	2 KW	2 KW	2.5 KW
Size (mm)	Ø 255 × 400	Ø 305 × 440	Ø 365 × 465	Ø 415 × 545



2 LAYERS



HEATING PLATE

voltage
220 V
MATERIAL
S/S 201
S/S THICKNESS
0.4 MM

MODEL	TT-WB10DP	TT-WB15DP	TT-WB25DP	TT-WB30DP	TT-WB35DP	TT-WB40DP
CAPACITY	8.8 L	12 L	19 L	27 L	32 L	37 L
POWER	1.5 KW	2 KW	2 KW	2 KW	2 KW	2 KW
Size (mm)	Ø 245 × 425	Ø 245 × 495	Ø 315 × 490	Ø 315 × 540	Ø 315 × 610	Ø 315 × 660

FILM WRAPPER

voltage
220v / 110v

MATERIAL
STAINLESS IRON



- Electric Thermostat
- Best for Food, Fruit, Vegetable, Fast Food

MODEL	TT-A14
SIZE	620×500×140 mm
WEIGHT	6.5 Kg
Consumption	230 W
Film max width	450 MM
Film max temp.	160 °c

HAND SEALER



MODEL	TT-A25		
Thickness OF BAG	0.04 mm	0.05 mm	0.06 mm
SIZE OF BAG (L X W)	(150-300) X (120-240)	(100-200) X (190-320)	(150-260) X (130-220)
Capacity	1111 pcs/hour		
Size	375×180×465 mm		
WEIGHT	7.3 Kg		
POWER	0.3 Kw		
Ribbon material	Aluminium		

HAND SEALER

voltage
220 V

SEALING WIDTH
2 MM



SIDE CUTTER

MIDDLE CUTTER

MODEL	Sealing Length	MATERIAL / type	SIZE	power	Weight
TT-Z16A	100 mm	Aluminum	500×480×340 mm	0.16 Kw	1.4 Kg
TT-Z17A	200 mm	Aluminum	520×360×380 mm	0.3 Kw	2.7 Kg
TT-Z18A	300 mm	Aluminum	490×350×400 mm	0.4 Kw	4.5 Kg
TT-Z19A	400 mm	Aluminum	490×350×400 mm	0.6 Kw	5.5 Kg
TT-Z16B	100 mm	Plastic	500×480×340 mm	0.16 Kw	1.4 Kg
TT-Z17B	200 mm	Plastic	520×360×380 mm	0.3 Kw	2.7 Kg
TT-Z18B	300 mm	Plastic	490×350×400 mm	0.4 Kw	4.5 Kg
TT-Z17C	200 mm	Iron	520×360×380 mm	0.3 Kw	2.7 Kg
TT-Z18C	300 mm	Iron	490×350×400 mm	0.4 Kw	4.5 Kg
TT-ZSC17	200 mm	SIDE CUTTER	325×75×225 mm	0.3 Kw	2.7 Kg
TT-ZSC18	300 mm	SIDE CUTTER	440×83×255 mm	0.4 Kw	4.5 Kg
TT-ZMC17	200 mm	MIDDLE CUTTER	570×400×435 mm	0.3 Kw	2.75 Kg
TT-ZMC18	300 mm	MIDDLE CUTTER	505×350×455 mm	0.4 Kw	4.5 Kg

MANUAL CUP SEALER

voltage
220 v 50 HZ

cup size
dia 75 mm / 95 mm

BEST
SELLER



(LOW BODY)



(HIGH BODY)



MODEL	TT-A29A	TT-A29B	TT-A29C
pushing cup	manual	manual	manual
sealing cup	manual	manual	manual
rolling	manual	manual	Automatic
OUTPUT	300-500 cups/h	300-500 cups/h	300-500 cups/h
size	390×250×415 mm	290×240×490 mm	290×280×490 mm
weight	11 kg	11 kg	13 kg
Power	0.35 kw	0.35 kw	0.35 kw

AUTOMATIC CUP SEALER

voltage
220 v 50 HZ

cup size
dia 75 mm / 95 mm



MODEL	TT-A30A	TT-A30B
pushing cup	manual	automatic
sealing cup	automatic	automatic
rolling	Automatic	automatic
OUTPUT	400-600 cups/h	400-600 cups/h
size	360×305×555 mm	360×305×555 mm
weight	22 kg	26 kg
Power	0.4 kw	0.4 kw

PACKING MACHINE

VACUUM PACKING MACHINE



- voltage

220 v
- POWER

0.8 KW
- Stainless steel vacuum housing

■ Gas flush, BUSCH pump is optional



TT-Z01A SINGLE SEALING



TT-Z02A SINGLE SEALING
TT-Z02B DOUBLE SEALING



TT-Z03A SINGLE SEALING
TT-Z03B DOUBLE SEALING

MODEL	TT-Z01A	TT-Z02A	TT-Z02B	TT-Z03A	TT-Z03B
Sealing Bar	260×8mm (Single)	400×10mm (Single)	400×10mm (Double)	500×10mm (Single)	500×10mm (Double)
Capacity	10 m³/H	20 m³/H	20 m³/H	20 m³/H	20 m³/H
SIZE	490×450×320 mm	560×500×1050 mm	560×500×1050 mm	630×620×460 mm	630×620×460 mm
Chamber Size	385×280×50 mm	440×420×75 mm	440×420×75 mm	520×525×10 mm	525×525×100 mm
Cycle Time	10-20 sec	10-25 sec	10-25 sec	15-30 sec	15-30 sec
POWER	400 W	400 W	900 W	900 W	900 W

- voltage

220 v
- Stainless steel vacuum housing

■ Gas flush, BUSCH pump is optional



TT-Z05A SINGLE SEALING
TT-Z05B DOUBLE SEALING



TT-Z06A SINGLE SEALING
TT-Z06B DOUBLE SEALING



MODEL	TT-Z05A	TT-Z05B	TT-Z06A	TT-Z06B
Sealing Bar	400×10mm(Single)	380×10mm(Double)	600×10mm(Single)	570×10mm(DOUBLE)
Capacity	20m³/H	20m³/H	40m³/H	40m³/H
SIZE	560×500×460 mm	560×500×460 mm	720×720×1050 mm	720×720×1050 mm
Chamber Size	440×420×75 mm	440×420×75 mm	625×625×100 mm	625×625×100 mm
Cycle Time	10-25sec	10-25sec	10-35sec	10-35sec
power	900 w	900 w	1500 w	1500 w

- voltage

380 v
- Stainless steel vacuum housing

■ Gas flush, BUSCH pump is optional



TT-Z08A SINGLE SEALING
TT-Z08B DOUBLE SEALING
TT-Z08C DOUBLE SEALING



MODEL	TT-Z08A	TT-Z08B	TT-Z08C
Sealing Bar	800×10mm (Single)	600×10mm (Double)	350×10mm (Double)
Capacity	40m³/H	40m³/H	40m³/H
SIZE	680×580×960 mm	680×580×960 mm	680×580×960 mm
Cycle Time	10-40 sec	10-40 sec	10-40 sec
power	1.5 kw	1.5 kw	1.5 kw

- voltage

380 v



TT-Z09A 520 MM SEALING WIDTH
TT-Z09B 620 MM SEALING WIDTH



TT-Z11A WITH GAS FLUSH FUNCTION
TT-Z11B



TT-Z12A WITH GAS FLUSH FUNCTION
TT-Z12B

DOUBLE CHAMBER

DOUBLE SEALING

MODEL	TT-Z09A	TT-Z09B	TT-Z11A	TT-Z11B	TT-Z12A	TT-Z12B
Sealing-Bar	520×10mm	620×10mm	500×10mm	500×10mm	620×10mm	620×10mm
Capacity	2×20m³/H	40m³/H	2×20m³/H	2×20m³/H	40m³/H	40m³/H
SIZE	1250×750×950 mm	1450×750×1000 mm	1250×750×950 mm	1250×750×950 mm	1450×750×1000 mm	1450×750×1000 mm
Cycle Time	10-35 sec	10-40 sec	10-35 sec	10-35 sec	10-40 sec	10-40 sec
power	1.5 kw	3.0 kw	1.5 kw	1.5 kw	3.2 kw	3.2 kw

CARTON SEALER

PEDAL SEALER

voltage
220 V

MODEL	TT-Z15A	TT-Z15B	TT-Z15C
Sealing Length	350 mm	450 mm	600 mm
SIZE	450×150×880 mm	550×520×880 mm	700×570×880 mm
Sealing Width	2-5 mm	2-5 mm	2-5 mm
Weight	19 Kg	21 Kg	24.5 Kg
power	0.6 kw	0.8 kw	1 kw



SHRINK PACKING MACHINE



- Compact construction
- The use of **stainless steel heater** to lower the power
- Great air-flow provides excellent heat distribution
- Automatic Temperature Control
- Variable speed live-roller (mesh) conveyor is easily adjustable



MODEL	TT-Z302A	TT-Z302B
voltage	220 v	380 v
ShRink product size	350×150 mm	400×200 mm
Converyor loading	5kg Maximum	10kg Maximum
Heater power	6.5 kw Adjustable	8 kw Adjustable
Conveyor speed	0-10 m/min	0-10 m/min
Tunnel size	830×400×200 mm	830×450×250 mm
SIZE	1200×640×1240 mm	1200×690×1290 mm
WEIGHT	80 Kg	100 Kg

COLORED-TAPE HOT PRINTER



MODEL	TT-Z408
voltage	220v 50hz / 40w
letters number	three lines 45 numbers
temperature	0 - 200 °C
weight	2.5 kg
size	225×200×155 mm



TWOTHOUSAND
WHOLESALE **SECURE** COMMERCIAL KITCHEN EQUIPMENT **FROM CHINA**

SERVE SINCE 2000